


ITEM TYPE : Lockable Gate Valve

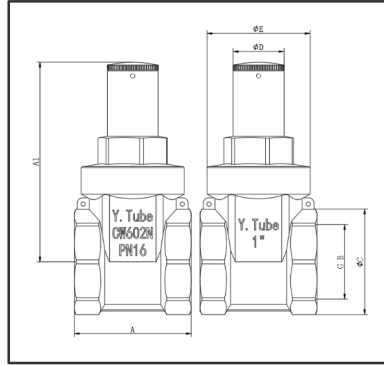

Y.TUBE DZR Brass Type A Fittings, is a specialized copper alloy engineered to resist dezincification.

- ▶ Available in sizes mentioned below
- ▶ Manufactured to BS EN1254-2 & CW602N
- ▶ Marked with the Y.TUBE logo
- ▶ WRAS Approved

SIZE (IN)

3/4"

1"

1 1/2"

2"

Dimensions

Article No.	Size (in)	A Min	A1 Min	GB	ØC Min	ØD Min	ØD Max	ØE Min	ØE Max
YT-DZR-LGV-S75	3/4"	46.3	46.7	G 3/4"	Ø33.7	Ø18.8	Ø19.2	Ø37	Ø37.4
YT-DZR-LGV-S1	1"	45.8	46.2	G 1"	Ø41.8	Ø19.8	Ø20.2	Ø40.3	Ø40.7
YT-DZR-LGV-S112	1 1/2"	63.8	111.8	G 1 1/2"	Ø62.3	Ø20.8	Ø21.2	Ø57.8	Ø58.2
YT-DZR-LGV-S2	2"	66.6	120.8	G 2"	Ø72.3	Ø20.8	Ø21.2	Ø67.3	Ø67.7

1/2" and 1 1/4" are available on request

Working Temperatures & Pressures

Max Temp. (1) °C	Max pressures for nominal diameters (1)(2) BAR
	From 6mm up to 54mm
30	16
65	10
110	6

Applications

- Domestic
- Commercial
- Industrial
- Hot and Cold water services
- Heating Installations
- Fuel services

Chemical Composition

Element Name	Copper (Cu)	Tin (Sn)	Steel (Fe)	Plumbum (Pb)	Aluminium (Al)	Nickel (Ni)	Manganese (Mn)	Arsenic (As)	Zinc (Zn)
Customer Request	>61	<0.1	<0.1	<2.5	<0.05	<0.3	/	0.1-0.15	Margin
Measured Data	61.5274	0.0478	0.0651	2.2130	0.0321	0.0712	0.0042	0.1179	Margin

All products have a pressure rating as per PN 16 standards